


RoomPanel Plus E2 Datasheet

Multifunctional Meeting Room Scheduling Panel

Yealink RoomPanel Plus E2 is a 10.1-inch multifunctional meeting room schedule panel that runs Android 13 and comes with full RGB programmable LED background illumination for immediately visible communication of room status. It includes multi-point touch capability, built-in NFC/RFID reader, enhanced microphone arrays and speakers to meet the diverse needs of the current office environment. Yealink RoomPanel Plus E2 can act as a stand-alone gateway, connect to meeting room sensors and automatically update meeting room schedules, providing various meeting room management functions. Also equipped with Powerover-Ethernet and various mounting brackets, Yealink RoomPanel Plus E2 could be easily mounted on any surface.

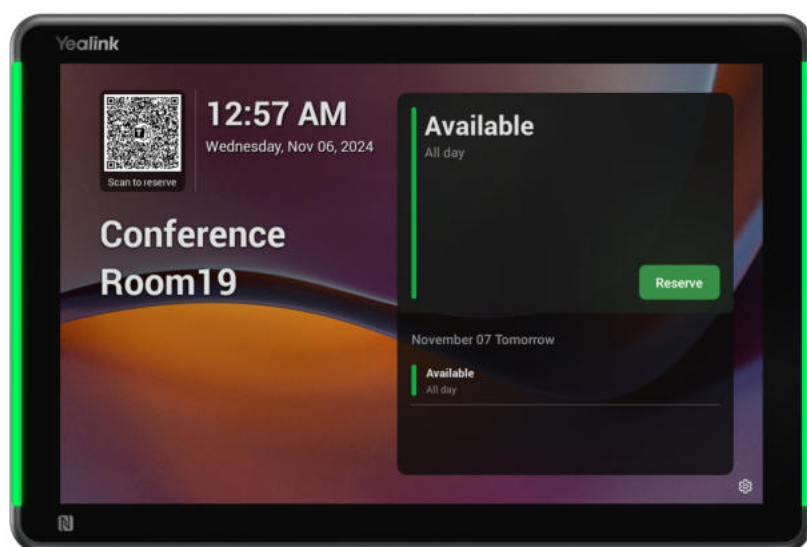

Key features and benefits

- 10.1-Inch Multi-Point Interactive Panel: Multi-Point touch capability screen to easily book rooms or check-in/out at RoomPanel Plus E2 .
- High Visibility LED Bars out Room Status: Full RGB LED bars for immediate all-around visible communication of room status.

- Ambient Light & Proximity Sensor Embedded: Environment self-adaptation. Automatically adjust the screen brightness and automatically wake up the screen.
- Various Mounting Methods: Supporting accessories such as no inclination or 20-degree inclination, mullion hangers, 3M glue, etc.
- Orientation Optional *: Easy to mount with portrait or landscape.
- PoE or DC Power: Minimalist and flexible installation, keep workspace tidy and modern.
- Remote Device Management: Easily monitor, manage, and diagnose by Yealink Management Cloud Server.
- WiFi&BLE5.0: Support using the wireless protocol to connect the front-end network and RoomSensor.
- RFID & NFC Embedded *: Enhance ID authorization security and track meeting attendees.
- Actions with Occupancy Sensor *: Actions with the room occupancy sensor, such as automatic release, automatic check-in, etc.
- Extensive APP compatibility: Support the integration of third-party APP applications.

***Subject to the functions of the third-party APP.**

Specifications

| Parameter | Description |
|-----------|--|
| Basic | <ul style="list-style-type: none">• Operating System: Android 13• Power Supply:<ul style="list-style-type: none">- Power over Ethernet (IEEE 802.3af/at)- DC 12V /1.25A |
| Display | <ul style="list-style-type: none">• Size(in): 10.1" LCD Panel• Resolution: 1280x800• Touch Screen: Multi points capacitive• Contrast: 1000:1• Viewing Angle: $\pm 90^{\circ}$• Anti-Fingerprints: Anti-fingerprint Coating |
| Sensors | <ul style="list-style-type: none">• Ambient Light Sensor• TOF Proximity Sensor |

| | |
|---------------|---|
| Connectivity | <ul style="list-style-type: none"> · 1 x Fast ethernet port(10/100Mbps) · Network: <ul style="list-style-type: none"> -Wired network: IEEE 802.1x: <ul style="list-style-type: none"> EAP-MD5 EAP-TLS EAP-PEAP/MSCHAPv2 EAP-TTLS/EAP-MSCHAPv2 -Wi-Fi: 802.11a/b/g/n/ac · Bluetooth: 5.0 · RFID/NFC: 13.56MHz · USB: 1 x USB-A port · Button: 1 x Reset pin hole |
| Audio | <ul style="list-style-type: none"> · Microphone: 2 x Microphone · Speaker: 2 x Speaker |
| Mounting | <ul style="list-style-type: none"> · Angle: No inclination or 20 degree inclination · Method: Wall, glass or side mount - 0° Mount Bracket - 20° Mount Bracket - Mullion Mount Bracket |
| Environmental | <ul style="list-style-type: none"> · Operating Temperature: 0~40°C · Operating Humidity: 10~95%, non-condensing |
| Dimensions | <ul style="list-style-type: none"> · Display size (mm): 247.6 x 166.36 (9.75" x 6.55") · Weight: 0.627 Kg (1.38 lb) |

Supported Platforms

| Platform |
|---------------|
| Teams |
| Zoom |
| Gingco |
| Gobright |
| Flowscape |
| Space Connect |

For more information, please go to the [Yealink official website](#).